

Dierks et al.

Method and Apparatus for Transferring Data From a Memory Subsystem to a Network Adapter for Improving the Memory Subsystem and PCI Bus Efficiency

1/4




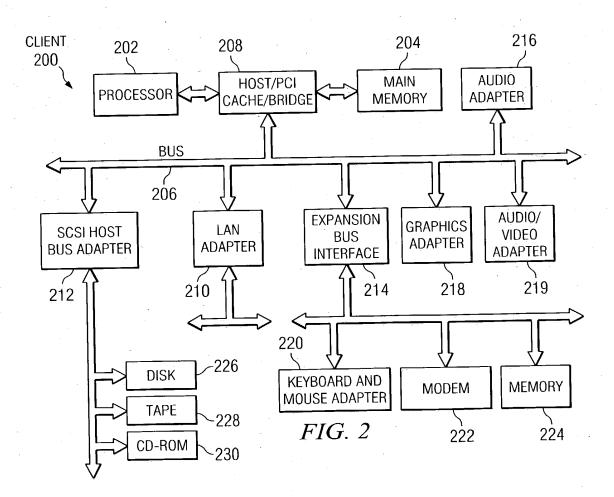


Dierks et al.

Method and Apparatus for Transferring Data From a Memory Subsystem to a Network Adapter for Improving the Memory Subsystem and PCI Bus Efficiency



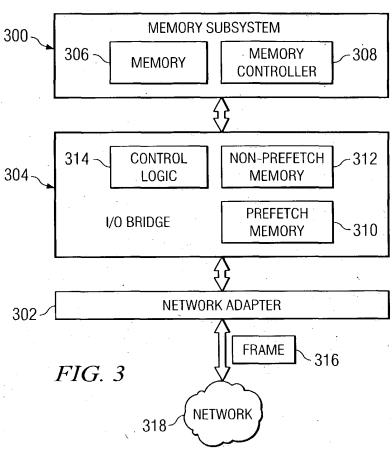

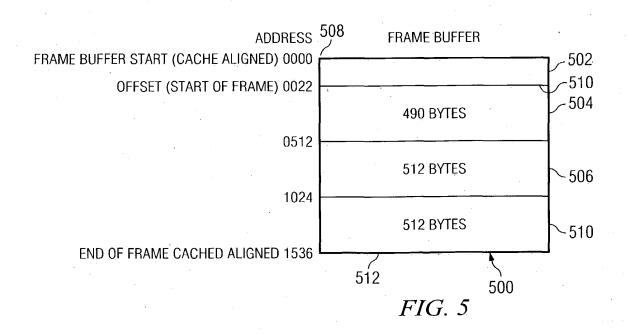

Dierks et al.

Method and Apparatus for Transferring Data From a Memory Subsystem to a Network Adapter for Improving the Memory Subsystem and PCI Bus Efficiency

3/4

400 \	PCI COMMAND	NUMBER OF BYTES TRANSFERRED	CUMULATIVE TOTAL]
	MRM	512	512	40%
	MRM	512	1024	40 س
,	MRM	384	1408	40 سر
	MR	8	1416	- 40
·	MR	8	1424	41 ¹ - 4
	MR	8	1432	41
-	MR	8	1440	41
	MR	8	1448	411
	MR	8	1456	41
	MR	8	1464	42
	MR	8	1472	42
	MR	8	1480	42
	MR	8	1488	42
	MR	8	1496	42
	MR	8	1504	43
i	MR	8	1512	43.
	MR	2	1514	43

FIG. 4 (PRIOR ART)

600	PCI COMMAND	NUMBER OF BYTES TRANSFERRED	CUMULATIVE TOTAL	600
*	MRM	490	490	602
	MRM	512	1002	604 سر
	MRM	512	1514	<u></u> 606

FIG. 6

Dierks et al.

Method and Apparatus for Transferring Data From a Memory Subsystem to a Network Adapter for Improving the Memory Subsystem and PCI Bus Efficiency

4/4

